


Specifications:
 Current Rating: 1.5 Amp
 Voltage Rating: 150V AC/DC
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PBT U94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information



No. of Rows Pitch:
 1. Single 1.06:0.8mm
 2. Double 2.10:1.0mm
 3. 12:1.27mm
 4. 20:2.0mm
 5. 25:2.54mm

No. of PIN: Plastic High: Waiving:
 10:1 0mm S180
 40~60P R:90
 16:1 0mm M:SR
 17:1 0mm W:SRMT
 25:2.54mm 5:1:2P

Order Code	Insulation Type	Material	Finish	Temp. Range
00	Lead Plated	Th. 100μ"	11	Th. 100μ"
01	Lead 1μ"	Th. 100μ"	12	Th. 200μ"
02	Lead 3μ"	Th. 100μ"	13	Th. 100μ"
03	Lead 5μ"	Th. 100μ"	14	Th. 100μ"
04	Lead 10μ"	Th. 100μ"	15	Th. 100μ"
05	Lead 15μ"	Th. 100μ"	16	Th. 100μ"
06	Lead 20μ"	Th. 100μ"	17	Th. 100μ"

Plastic Base

Type	可定制尺寸
H	1.5/2.0
PA	3.0
PB	
PD	8.0
PC	3.0






PCB Layout




品名 (TITLE): PH2.0 2*NP SMT 双塑 无柱 系列图

A4

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		线性 (LINER)		角度 (ANGLES)		第三型角投影 THIRD ANGLE PROJECTION	
x ± --	x' ± ± --	.x ± 0.20	.xx ± 0.15	.xxx ± 0.10	.xxx ± --	第三型角投影 THIRD ANGLE PROJECTION	
绘图 (DRAWING)		审核 (CHECK)		批准 (APPROVED)		日期 (DATE)	
Sutzhooing		Call Wang		.study Wang			
料号 (PART NO.): 1220-XX220S00X-31		图号 (DWG NO.):		比例 (SCALE) 1:1		单位 (UNIT) MM	
版次 (REV.)		版次 (REV.)		页次 (SHEET) 10F1			

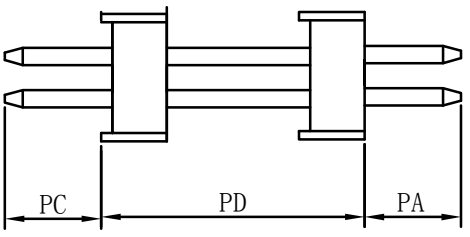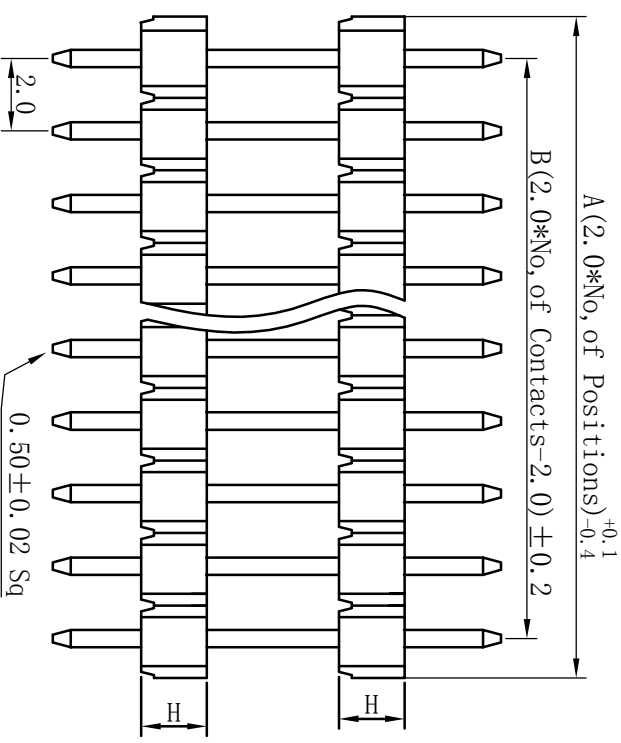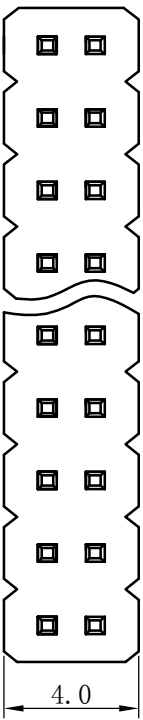


Plastic Base	
Type	可定制尺寸
H	1.5/2.0
PA	4.0
PB	
PD	8.0
PC	3.0

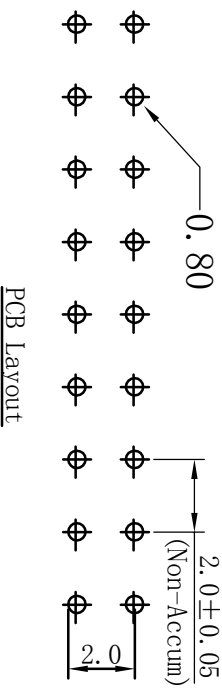

Specifications:
 Current Rating: 1.5 Amp
 Voltage Rating: 150V AC/DC
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~ +105° C
 Material And Finish
 Insulator: Polyester, (PBT U94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information



- NO. of Rows** Pitch:
 1. Single 1.08:0.8mm
 2. Double 2.10:1.0mm
 3. 12:1.27mm
 4. 20:2.0mm
 5. 25:2.54mm

- No. of PIN:**
 10:1 0mm (2-10P)
 40:40P
 15:15P

- Plastic Height:**
 10:1.0mm S180
 15:1.1mm R30
 16:1.0mm M:SN
 17:1.1mm W:SN
 25:2.5mm

- Plastic Parting:**
 Material: 1:ibag
 2:FR9
 3:ibag
 4:PMPT
 5:LC2

Order Code	Ordering Code	Material	Parting
00	Lead 100"	10	100"
01	Lead 11"	11	100"
02	Lead 12"	12	100"
03	Lead 13"	13	100"
04	Lead 14"	14	100"
05	Lead 15"	15	100"
06	Lead 16"	16	100"
07	Lead 17"	17	100"

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE

线性 (LINER)	角度 (ANGLES)	品名 (TITLE):	PH2.0 2*NIP SMT 双塑 无柱 系列图	
X ± --	X' ± ± 1'	绘图 (DRAWING)	料号 (PART NO.):	1220-XX220S00X-31
.X ± 0.20	.X' ± ± --	审核 (CHECK)	图号 (DWG NO.):	
.XX ± 0.15	.XX' ± ± --	核准 (APPROVED)	比例 (SCALE)	1:1
.XXX ± 0.10	.XXX' ± ± --	日期 (DATE)	版本 (REV.)	AO

第三视角投影 THIRD ANGLE PROJECTION

GoXconn

单位 (UNIT) MM

页数 (SHEET) 10F1