


Plastic Base

Type	可定制尺寸	∅0.8±0.05	2.0±0.05 (Non-Accum)	2.0±0.05
H	1.5/2.54			
PA	6.0	PCB Layout		
PB	6.5			
PD	8.0			
PC	3.0			

Specifications:
 Current Rating: 1.5 Amp
 Voltage Rating: 150V AC/DC
 Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/Minute
 Operating Temperature Range: -40° ~+105° C
 Material And Finish
 Insulator: Polyester, (PBT U94V-0)
 Insulator Color: Black
 Contact: Brass
 Contact Plated: See Contact Plated Tab.

Ordering information

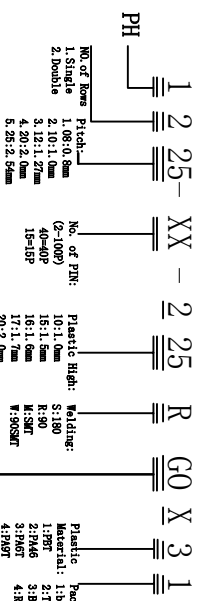

Order Code	Ordering Code	Ordering Code	Ordering Code
00	Lead 100"	10	100"
01	Lead 11"	11	100"
02	Lead 12"	12	100"
03	Lead 13"	13	100"
04	Lead 14"	14	100"
05	Lead 15"	15	100"
06	Lead 16"	16	100"
07	Lead 17"	17	100"
08	Lead 18"	18	100"
09	Lead 19"	19	100"
10	Lead 20"	20	100"



品名 (TITLE): PH2.54 2*NP 90° DIP 双塑 系列图 A4

线性 (LINER)		角度 (ANGLES)		品名 (TITLE): PH2.54 2*NP 90° DIP 双塑 系列图	
x ± --	.x ± 0.20	x' ± ± --	.x' ± ± --	绘图 (DRAWING)	Subdrawing
.xx ± 0.15	.xxx ± 0.10	.xx' ± ± --	.xxx' ± ± --	审核 (CHECK)	Call Wang
第三级角投影 THIRD ANGLE PROJECTION		第三级角投影 THIRD ANGLE PROJECTION		批准 (APPROVED)	料号 (PART NO.): 1225-XX225R00X-31
日期 (DATE)		日期 (DATE)		图号 (DWG NO.):	单位 (UNIT): 1:1
				版本 (REV.):	页次 (SHEET): 10F1