



Position	1 Thru 40
Plastic Height (H)	8.5 5.7 3.5



Specifications:  
 Current Rating: 3 Amp  
 Contact resistance: 20MΩ Max  
 Insulator resistance: 1000MΩ Min.  
 Withstanding Voltage: 500V AC  
 Operating Temperature Range: -40° ~ +105° C  
 Material And Finish  
 Insulator: Polyester, (PBT U94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Contact Plated: See Contact Plated Tab.

Ordering information

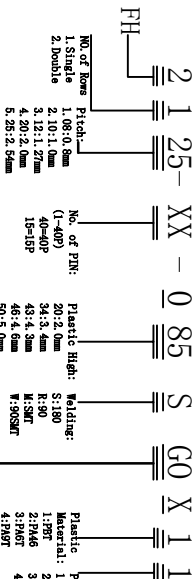





Order Code	Order Quantity	Order Description	Order Unit
00	1000	1000	1000
01	1000	1000	1000
02	1000	1000	1000
03	1000	1000	1000
04	1000	1000	1000
05	1000	1000	1000
06	1000	1000	1000
07	1000	1000	1000

UNLESS OTHERWISE SPECIFIED TOLERANCE		品名 (TITLE):	
线性 (LINER)	X ± --	角度 (ANGLES)	X° ± ± ±
	.X ± 0.20		.X° ± ± ±
	.XX ± 0.15		.XX° ± ± ±
	.XXX ± 0.10		.XXX° ± ± ±
第三级角投影 THIRD ANGLE PROJECTION		核准 (APPROVED)	日期 (DATE)
		绘图 (DRAWING)	审核 (CHECK)
		Subdrawing	料号 (PART NO.):
		Call Wang	2125-XX0855C0X-11
		·Study Wang	图号 (DWG NO.):
			比例 (SCALE)
			版次 (REV)
			单位 (UNIT)
			页次 (SHEET)
			10F1




FH2.54\*H 1\*NP 180° Y端 系列图

A4

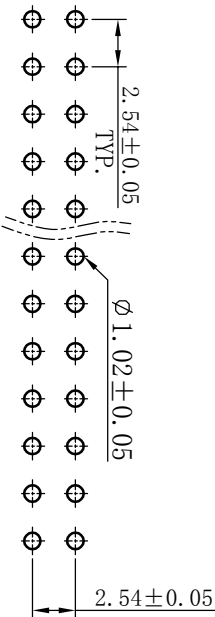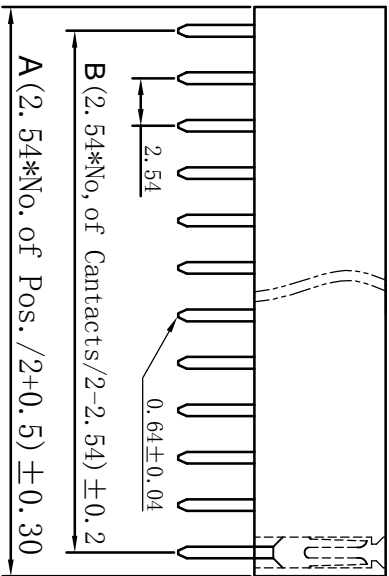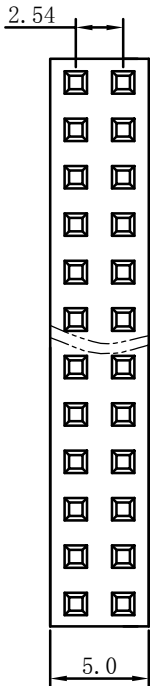

Position	2	Thru	80
Plastic Height	8.5	5.7	3.5

Ordering information

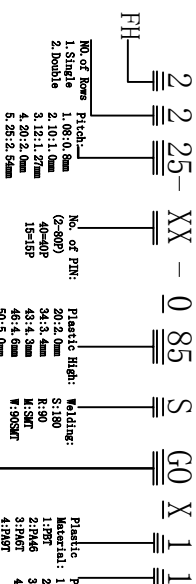

Color	Material	Finish	Part No.
00	Lead 100%	100%	100%
01	Lead 100%	100%	100%
02	Lead 100%	100%	100%
03	Lead 100%	100%	100%
04	Lead 100%	100%	100%
05	Lead 100%	100%	100%
06	Lead 100%	100%	100%
07	Lead 100%	100%	100%



品名 (TITLE): FH2.54\*H 2\*NP 180° Y端 系列图

A4

未注公差 UNLESS OTHERWISE SPECIFIED TOLERANCE		线性 (LINER)		角度 (ANGLES)		第三级角投影 THIRD ANGLE PROJECTION	
x ± --	x' ± ±	.x ± 0.20	.x' ± ±	.xxx ± 0.10	.xxx' ± ±		
品名 (TITLE): FH2.54*H 2*NP 180° Y端 系列图		绘图 (DRAWING)	审核 (CHECK)	日期 (DATE)	批准 (APPROVED)	日期 (DATE)	日期 (DATE)
料号 (PART NO.): 2225-XX085G0X-11		制图 (DRAWING)	审核 (CHECK)	日期 (DATE)	批准 (APPROVED)	日期 (DATE)	日期 (DATE)
单位 (UNIT): MM		比例 (SCALE): 1:1	版次 (REV): AO	页次 (SHEET): 10F1			